

**PROJECT NAME:** \_\_\_\_\_

**LOCATION:** \_\_\_\_\_

**SPECIFIER ITEM NO.** \_\_\_\_\_ **QTY:** \_\_\_\_\_

**ENCORE PART NO.** \_\_\_\_\_

Encore<sup>®</sup> QUIK-FLO<sup>™</sup> Rotary Drain

**DBN-8000 Series**

- DBN-8000-X Capped Overflow Outlet
- DBN-8000-SPI Capped Overflow Outlet, Flat Strainer
- DBN-8015-SPI Overflow Assembly, Flat Strainer

Solid heavy duty cast body is specification and commercial quality

**Commercial Quality Features**

- Nickel plated cast brass drain body
- Self-centering stainless steel face flange
- Stainless steel rotary handle
- 3 times the flow rate of conventional lever drains
- Services from the top; no disassembly required


**SPECIFICATIONS:**

QUIK-FLO Rotary Drain to be Encore DBN-8000 Series in the following configuration:

- \_\_\_\_ DBN-8000-X Capped Overflow Outlet
- \_\_\_\_ DBN-8000-SP1 Capped Overflow Outlet, Flat Strainer
- \_\_\_\_ DBN-8015-SP1 Overflow Assembly, Flat Strainer

Drain to have nickel plated solid all metal construction. Drain to be for 3-1/2" sink opening diameter. Drain to have self-centering stainless steel face flange with stainless steel beehive crumb cup strainer. Drain to be designed for trouble free fast drainage when the stainless steel rotary handle is in the open position and has a positive sealing action when closed. Drain to accept 1-1/4" OD overflow elbow tube. To be universal style for use with both 2" male NPSM or 1-1/2" NPT female outlet.

US Patent 6, 145, 136

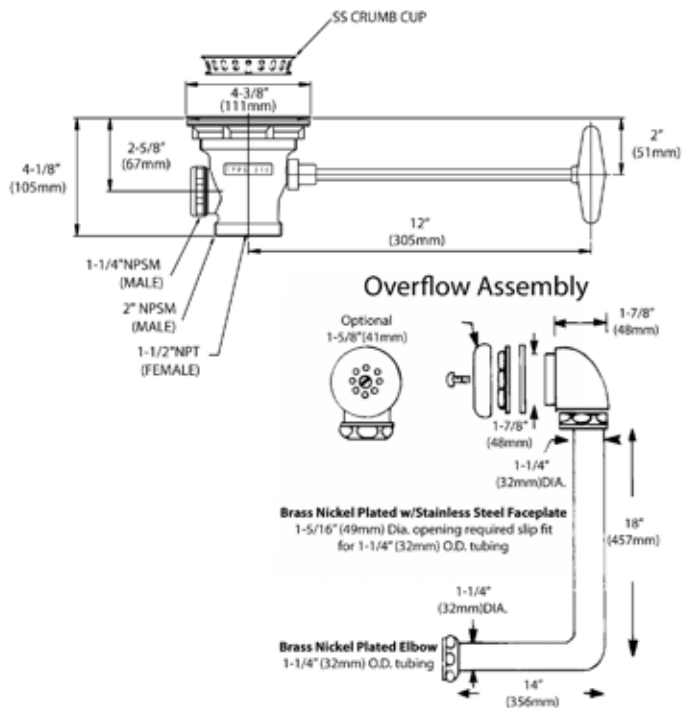

Dimensions shown in inches (mm) are for reference only and are subject to change.

1-1/2" or 2" NPS Male waste outlet  
 Flow Rate: Max 40gpm

Approximate shipping weight - 5 lbs  
 Warranty - 2 years parts



**COMPLIES WITH:**  
 ANSI A112.18.1/B125