


**PROJECT NAME:** \_\_\_\_\_

**LOCATION:** \_\_\_\_\_

**SPECIFIER ITEM NO.** \_\_\_\_\_ **QTY:** \_\_\_\_\_

**ENCORE PART NO.** \_\_\_\_\_

Encore<sup>®</sup> Fan Spray Valve Assembly  
**KL50-Y002-FS**

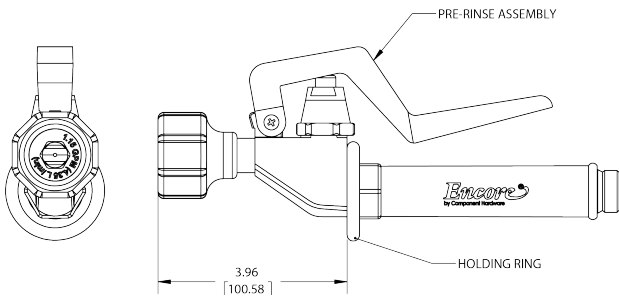

*Dimensions shown in inches (mm) are for reference only and are subject to change.*

1/2" NPSM Male Inlets  
 Operating Temperature: 40-180°F (5-83°C)  
 Operating Pressure: 15-125psi

Approximate shipping weight - 1 lb  
 Warranty - 3 years parts

Heavy duty fan spray valve assembly designed to withstand the demands of foodservice operations

**Commercial Quality Features**

- Polished chrome plated low lead brass spray valve
- 1.15gpm fan knife spray
- Ergonomic handle fits comfortably even in small hands; easy to use
- Effectively removes food or residue on dishware
- Non-marring, protective dish guard impact resistant bumper
- Includes Kool Grip™ Hose Grip. Reduces heat transfer to the hand; stays up to 30 degrees cooler than competitors' grips
- Meets new EPA Class II Water Conservation requirements
- Interchangeable with all major brands

**Specifications:**

Fan spray valve assembly to be Encore KL50-Y002-FS. Fan spray valve assembly to be constructed of polished chrome plated brass. Handle includes hold-open ring. Non-marring, protective dish guard impact resistant bumper provides a positive, non-leaking seal made from a heat resistant material that will not fatigue under extreme operating temperatures. Fan spray nozzle is 1.15gpm with a fan knife spray pattern.

\*Note: All flow rates are @ 60psi.

COMPLIES WITH:  
 THE FEDERAL "REDUCTION OF LEAD  
 IN DRINKING WATER ACT" -  
 2011 - US SENATE BILL NO. S.3874  
 NSF/ANSI 61/9, ANNEX G

