

PROJECT NAME: _____

LOCATION: _____

SPECIFIER ITEM NO. _____ **QTY:** _____

ENCORE PART NO. _____


Encore[®] Low Lead Deck Mount
 Utility Spray Assembly

KL73-2000-xx

KL73-2000 Without vacuum breaker
 KL73-2000-VB With vacuum breaker



KL73-2000 shown

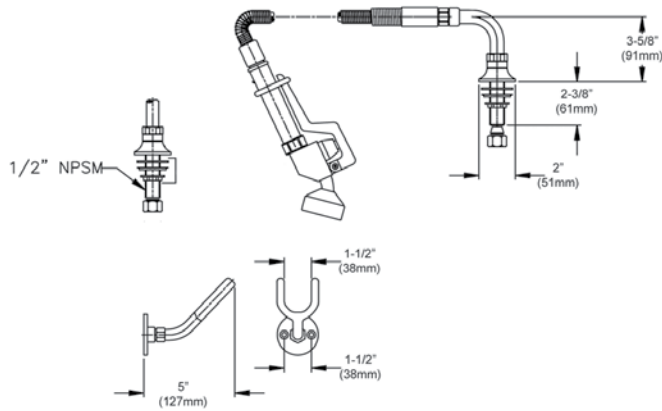

Dimensions shown in inches (mm) are for reference only and are subject to change.

1-1/8" (29mm) holes for deck are recommended to accommodate 1/2" supply nipples.

1/2" NPT female inlet

Operating Temperature: 40-180°F (5-83°C)

Operating Pressure: 15-125psi

Approximate shipping weight - 5 lbs

Warranty - 2 years parts

Solid heavy duty cast body is specification and commercial quality

Commercial Quality Features

- Provided with 3.3gpm, 1.6gpm, and 1.2gpm spray faces
- 72" flexible S/S hose with Kool Grip[™] handle

SPECIFICATIONS:

Low Lead Deck Mount Utility Spray to be Encore KL73-2000 Series in the following configuration:

- _____ KL73-2000 Without Vacuum Breaker
- _____ KL73-2000-VB With Vacuum Breaker

Faucet body to be constructed of polished chrome plated brass with lever handles. Hose to be 72" flexible stainless steel with Kool Grip[™] handle. Hose to have Santoprene[®] reinforced inner hose. Hold open ring and hose wall hook to be included.

COMPLIES WITH:

ASME A112.18.1-2005
 CSA B125.1-05
 NSF/ANSI 61/9, ANNEX G
 SECTION 116875 OF THE
 CALIFORNIA HEALTH & SAFETY CODE
 (COMMONLY KNOWN AS AB1953)
 VERMONT ACT 193
 UNIFORM PLUMBING CODE

