

VALUE AND PERFORMANCE





Component Hardware is the premier source for proprietary and industry-specific specialty components with special emphasis on sustainability, labor efficiency, and life cycle value. Bringing nearly 35 years of expertise in design innovation, sourcing, warehousing and global supply chain management to OEMs, fabricators, and facility operators worldwide.

Encore

Encore Premium Plumbing Products are recognized around the world by leading foodservice operators and institutional facility managers for its durability, water savings, energy efficiency, and meeting the most stringent sanitation standards.



Top-Line Plumbing Products offer a cost saving alternative to meet the demand of the foodservice market for durable, water saving plumbing fixtures.




Flame Gard offers the widest variety of commercial grease filters and kitchen exhaust system accessories and are engineered for safety, performance, efficiency and, above all, code compliance.



Keil Refrigeration provides value-added hardware and lighting systems for reach-in and walk-in refrigeration manufacturers worldwide. Our innovation durability, and energy efficiency, provide the best in quality and service in the most demanding environments.


INTRODUCTION TO TOP-LINE PL	LUMBING	TOP-LINE HYBRID FAUCET	
Top-Line Product Overview	2-3	Wall/Splash Mount 4" OC	22
		Deck Mount Faucet 4" OC	22
TOP-LINE POWERPULSE PRE-RIN	ISE ASSEMBLIES		
Wall/Splash Mount 8" OC	4	TOP-LINE SERVICE SINK FAUCET	
Deck Mount Double Pantry	5	Splash Mount Faucet	23
Deck Mount Elevated Bridge 8" OC	6		
Deck Mount Elevated Bridge 4" OC	7	TOP-LINE DRAINS	
Deck Mount Single Pantry	8	Lever Handle Drain	24
		Twist Handle Drain	24
TOP-LINE STANDARD PRE-RINSE	ASSEMBLIES	Sink Mate Rotary Drain	25
Wall/Splash Mount 8" OC	9		
Deck Mount Double Pantry	10	TOP-LINE ACCESSORIES	
Deck Mount Elevated Bridge 8" OC	11	Faucet Bodies	26
Deck Mount Elevated Bridge 4" OC	12	Spouts	27
Deck Mount Single Pantry	13	Replacement Handles	27
		Repair Kits	27
TOP-LINE WALL/SPLASH MOUN	T FAUCETS	Mounting Kits	28
Wall/Splash Mount 8" OC	14	Adapters	28
Wall/Splash Mount 4" OC	15	Replacement Hoses	29
		Pre-Rinse Spring	29
TOP-LINE DECK MOUNT FAUCE	TS	Pre-Rinse Risers	29
Deck Mount Faucet 4" OC	16	Pre-Rinse Top Half	29
Deck Mount Faucet 8" OC	17	Pre-Rinse Wall Bracket	29
Deck Mount Elevated Bridge 8" OC	18	Pre-Rinse Accessories	30
Deck Mount Elevated Bridge 4" OC	19	Pre-Rinse Grip	30
Deck Mount Double Pantry	20	Replacement Spray Heads	30
Deck Mount Single Pantry	21	Add-On Faucets	30
TOP-LINE HYBRID FAUCET		TOP-LINE POP DISPLAYS	
Wall/Splash Mount 4" OC	22	Countertop Display	31
Deck Mount Faucet 4" OC	22		
		TOP-LINE TERMS & CONDITIONS	S
TOP-LINE SERVICE SINK FAUCET		Terms & Conditions, Warranty	32
Splash Mount Faucet	23		

Compare us to the Competition*

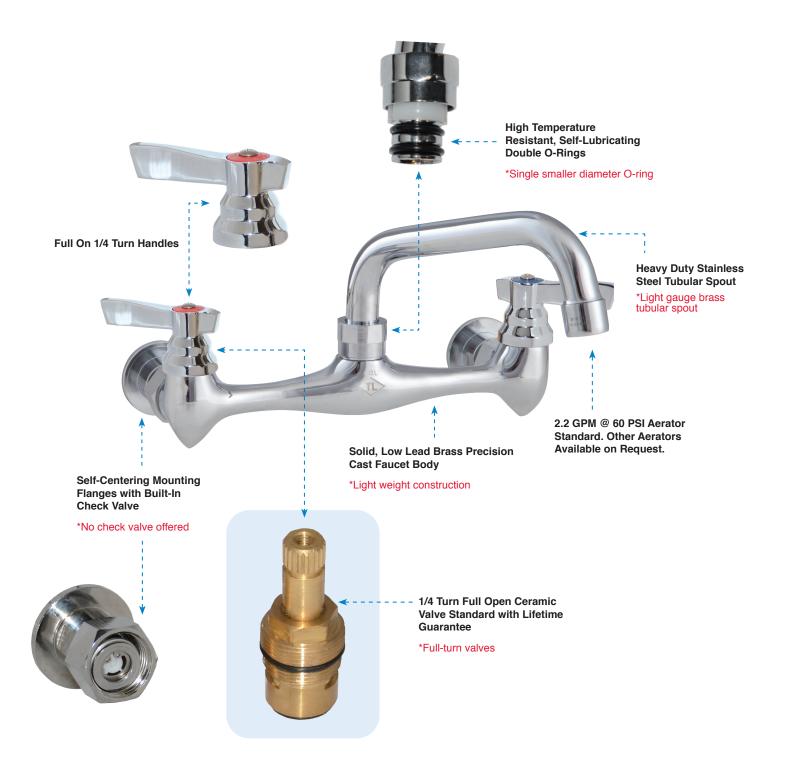

^{*}Compared to competition - details from most current competitor sales literature

Compare us to the Competition*

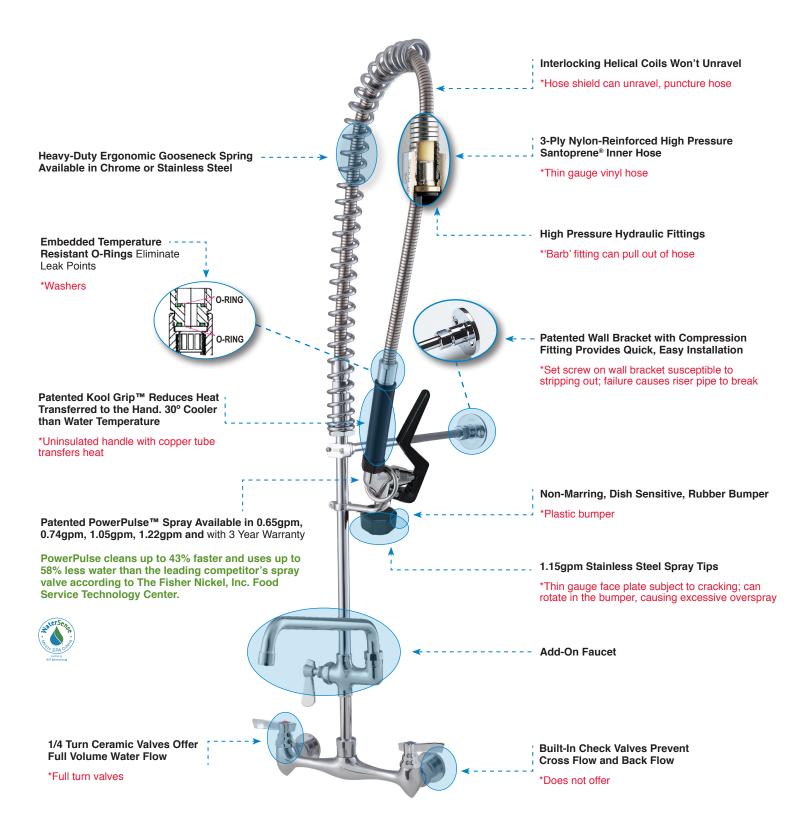

^{*}Compared to competition - details from most current competitor sales literature

Santoprene® is a registered trademark of ExxonMobil Corporation

PRE-RINSE 8" OC SPLASH MOUNT WITH POWERPULSE SPRAY TLP13-11Lx-BRZ SERIES

PRODUCT OVERVIEW / FEATURES

Power Pulse Spray cleans faster, as low as 12 seconds, and reduces water consumption by up to 58%.

- 8" OC splash mount
- Chrome plated spring
- Patented "Kool Grip" lowers surface temperature up to 30° cross flow and back flow
- 1/4 Turn full open ceramic valves with lifetime guarantee
- Patented wall bracket with compression fitting

Model No.	Flow Rate
TLP13-11L2-BRZ	0.67gpm
TLP13-11L3-BRZ	0.74gpm
TLP13-11L4-BRZ	1.05gpm
TLP13-11L5-BRZ	1.22gpm


Model No.	Spout Length (A)
TLP13-11Lx-AF1	6" (152mm)
TLP13-11Lx-AF2	8" (203mm)
TLP13-11Lx-AF3	10" (254mm)
TLP13-11Lx-AF4	12" (305mm)
TLP13-11Lx-AF5	14" (356mm)
TLP13-11Lx-AF6	16'' (406mm)
TLP13-11Lx-AF7	18" (457mm)

To add optional mounting kit use TLP13-11Lx-BRMKZ

To add optional mounting kit with add-on models use TLP13-11Lx-AFxMKZ

Approximate shipping weight - 13 lb Warranty - 1 year parts NOTE: Uses TLL-0010 Repair Kit



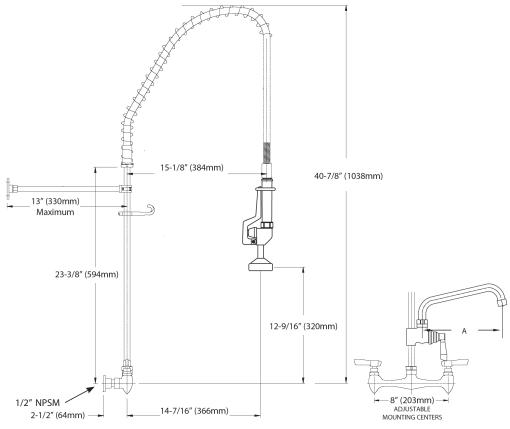



PRE-RINSE DECK MOUNT DOUBLE PANTRY WITH POWERPULSE SPRAY TLP50-11Lx-BRZ SERIES

PRODUCT OVERVIEW / FEATURES

Power Pulse Spray cleans faster, as low as 12 seconds, and reduces water consumption by up to 58%.


- Double pantry deck mount
- Chrome plated spring
- Patented "Kool Grip" lowers surface temperature up to 30° cross flow and back flow
- ¼ Turn full open ceramic valves with lifetime guarantee
- Patented wall bracket with compression fitting

Model No.	Flow Rate
TLP50-11L2-BRZ	0.67gpm
TLP50-11L3-BRZ	0.74gpm
TLP50-11L4-BRZ	1.05gpm
TLP50-11L5-BRZ	1.22gpm

Model No.	Spout Length (A)
TLP50-11Lx-AF1	6" (152mm)
TLP50-11Lx-AF2	8" (203mm)
TLP50-11Lx-AF3	10" (254mm)
TLP50-11Lx-AF4	12" (305mm)
TLP50-11Lx-AF5	14" (356mm)
TLP50-11Lx-AF6	16'' (406mm)
TLP50-11Lx-AF7	18" (457mm)

Approximate shipping weight - 10 lb Warranty - 1 year parts NOTE: Uses TLL-0010 Repair Kit



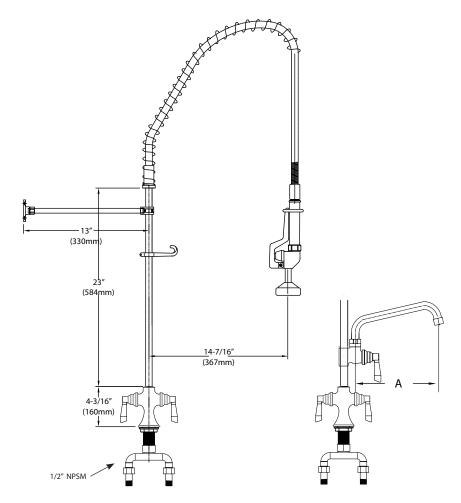

PRE-RINSE 8" OC ELEVATED DECK MOUNT WITH POWERPULSE SPRAY TLP61-11Lx-BRZ SERIES

PRODUCT OVERVIEW / FEATURES

Power Pulse Spray cleans faster, as low as 12 seconds, and reduces water consumption by up to 58%.

- 8" OC elevated deck mount
- Chrome plated spring
- Patented "Kool Grip" lowers surface temperature up to 30° cross flow and back flow
- 1/4 Turn full open ceramic valves with lifetime guarantee
- Patented wall bracket with compression fitting

Model No.	Flow Rate
TLP61-11L2-BRZ	0.67gpm
TLP61-11L3-BRZ	0.74gpm
TLP61-11L4-BRZ	1.05gpm
TLP61-11L5-BRZ	1.22gpm

Model No.	Spout Length (A)
TLP61-11Lx-AF1	6" (152mm)
TLP61-11Lx-AF2	8" (203mm)
TLP61-11Lx-AF3	10" (254mm)
TLP61-11Lx-AF4	12" (305mm)
TLP61-11Lx-AF5	14" (356mm)
TLP61-11Lx-AF6	16'' (406mm)
TLP61-11Lx-AF7	18" (457mm)


To add optional mounting kit use TLP61-11Lx-BRMKZ

To add optional mounting kit with add-on models use TLP61-11Lx-AFxMKZ

Approximate shipping weight - 13 lb Warranty - 1 year parts

NOTE: Uses TLL-0010 Repair Kit



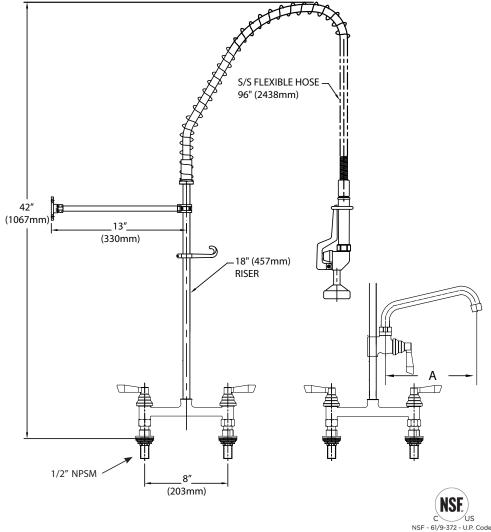

PRE-RINSE 4" OC ELEVATED DECK MOUNT WITH POWERPULSE SPRAY TLP57-11Lx-BRZ SERIES

PRODUCT OVERVIEW / FEATURES

Power Pulse Spray cleans faster, as low as 12 seconds, and reduces water consumption by up to 58%.

- 4" OC elevated deck mount
- Chrome plated spring
- Patented "Kool Grip" lowers surface temperature up to 30° cross flow and back flow
- ¼ Turn full open ceramic valves with lifetime guarantee
- Patented wall bracket with compression fitting

Model No.	Flow Rate
TLP57-11L2-BRZ	0.67gpm
TLP57-11L3-BRZ	0.74gpm
TLP57-11L4-BRZ	1.05gpm
TLP57-11L5-BRZ	1.22gpm


Model No.	Spout Length (A)
TLP57-11Lx-AF1	6" (152mm)
TLP57-11Lx-AF2	8" (203mm)
TLP57-11Lx-AF3	10" (254mm)
TLP57-11Lx-AF4	12" (305mm)
TLP57-11Lx-AF5	14" (356mm)
TLP57-11Lx-AF6	16'' (406mm)
TLP57-11Lx-AF7	18" (457mm)

To add optional mounting kit use TLP57-11Lx-BRMKZ

To add optional mounting kit with add-on models use TLP57-11Lx-AFxMKZ

Approximate shipping weight - 10 lb Warranty - 1 year parts NOTE: Uses TLL-0010 Repair Kit



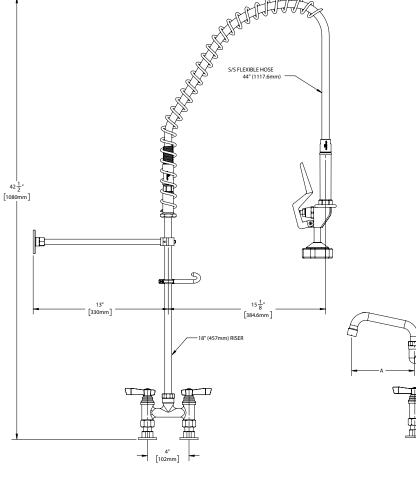

PRE-RINSE DECK MOUNT SINGLE PANTRY WITH POWERPULSE SPRAY TLP20-11Lx-BRZ SERIES

PRODUCT OVERVIEW / FEATURES

Power Pulse Spray cleans faster, as low as 12 seconds, and reduces water consumption by up to 58%.

- Single pantry deck mount
- Chrome plated spring
- Patented "Kool Grip" lowers surface temperature up to 30° cross flow and back flow
- 1/4 Turn full open ceramic valves with lifetime guarantee
- Patented wall bracket with compression fitting


Model No.	Flow Rate
TLP20-11L2-BRZ	0.67gpm
TLP20-11L3-BRZ	0.74gpm
TLP20-11L4-BRZ	1.05gpm
TLP20-11L5-BRZ	1.22gpm

Model No.	Spout Length (A)
TLP20-11Lx-AF1	6" (152mm)
TLP20-11Lx-AF2	8" (203mm)
TLP20-11Lx-AF3	10" (254mm)
TLP20-11Lx-AF4	12" (305mm)
TLP20-11Lx-AF5	14" (356mm)
TLP20-11Lx-AF6	16" (406mm)
TLP20-11Lx-AF7	18" (457mm)

Approximate shipping weight - 10 lb Warranty - 1 year parts NOTE: Uses TLL-0010 Repair Kit



8

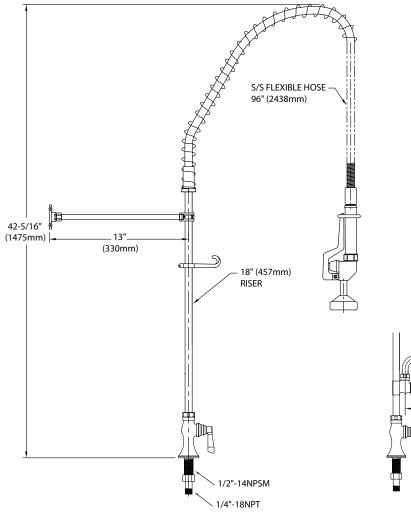

Solid low lead heavy-duty cast body with fan knife spray valve.

- 8" OC splash mount
- Chrome plated spring
- Patented "Kool Grip" lowers surface temperature up to 30° cross flow and back flow
- 1.15 gpm @ 60 psi water saving spray head
- 1/4 Turn full open ceramic valves with lifetime guarantee
- Patented wall bracket with compression fitting

Model No.	Description
TLL13-1100-BRZ	Without Add-On Faucet


Model No.	Spout Length (A)
TLL13-1100-AF1	6" (152mm)
TLL13-1100-AF2	8" (203mm)
TLL13-1100-AF3	10" (254mm)
TLL13-1100-AF4	12" (305mm)
TLL13-1100-AF5	14" (356mm)
TLL13-1100-AF6	16" (406mm)
TLL13-1100-AF7	18" (457mm)

To add optional mounting kit use TLL13-1100-BRMKZ

To add optional mounting kit with add-on models use TLL13-1100-AFxMKZ

Approximate shipping weight - 13 lb Warranty - 1 year parts NOTE: Uses TLL-0010 Repair Kit



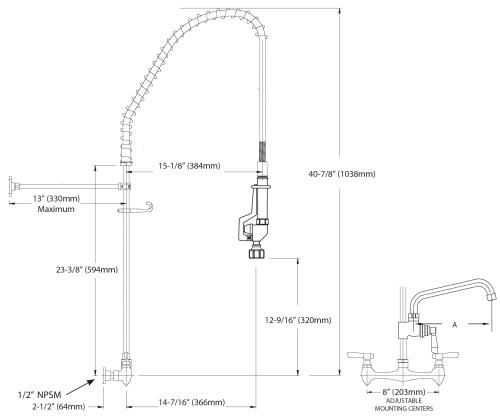



PRE-RINSE DECK MOUNT DOUBLE PANTRY TLL50-1100 SERIES

PRODUCT OVERVIEW / FEATURES

Solid low lead heavy-duty cast body with fan knife spray valve.

- Double pantry deck mount
- Chrome plated spring
- Patented "Kool Grip" lowers surface temperature up to 30° cross flow and back flow
- 1.15 gpm @ 60 psi water saving spray head
- 1/4 Turn full open ceramic valves with lifetime guarantee
- Patented wall bracket with compression fitting


Model No.	Description
TLL50-1100-BRZ	Without Add-On Faucet


Model No.	Spout Length (A)
TLL50-1100-AF1Z	6" (152mm)
TLL50-1100-AF2Z	8" (203mm)
TLL50-1100-AF3Z	10" (254mm)
TLL50-1100-AF4Z	12" (305mm)
TLL50-1100-AF5Z	14" (356mm)
TLL50-1100-AF6Z	16" (406mm)
TLL50-1100-AF7Z	18" (457mm)

Approximate shipping weight - 10 lb Warranty - 1 year parts

NOTE: Uses TLL-0010 Repair Kit



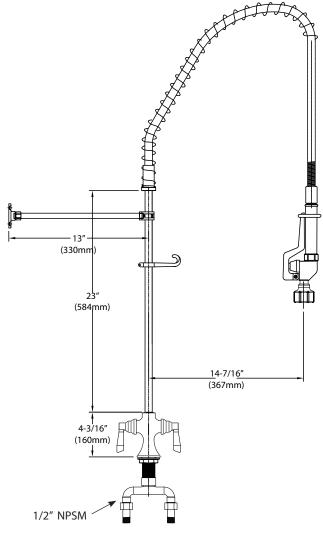



Solid low lead heavy-duty cast body with fan knife spray valve.

- 8" elevated deck mount
- Chrome plated spring
- Patented "Kool Grip" lowers surface temperature up to 30° cross flow and back flow
- 1.15 gpm @ 60 psi water saving spray head
- ¼ Turn full open ceramic valves with lifetime guarantee
- Patented wall bracket with compression fitting

Model No.	Description
TLL61-1100-BRZ	Without Add-On Faucet


Model No.	Spout Length (A)
TLL61-1100-AF1Z	6" (152mm)
TLL61-1100-AF2Z	8" (203mm)
TLL61-1100-AF3Z	10" (254mm)
TLL61-1100-AF4Z	12" (305mm)
TLL61-1100-AF5Z	14" (356mm)
TLL61-1100-AF6Z	16" (406mm)
TLL61-1100-AF7Z	18" (457mm)

To add optional mounting kit use TLL61-1100-BRMKZ

To add optional mounting kit with add-on models use TLL61-1100-AFxMKZ

Approximate shipping weight - 13 lb Warranty - 1 year parts NOTE: Uses TLL-0010 Repair Kit



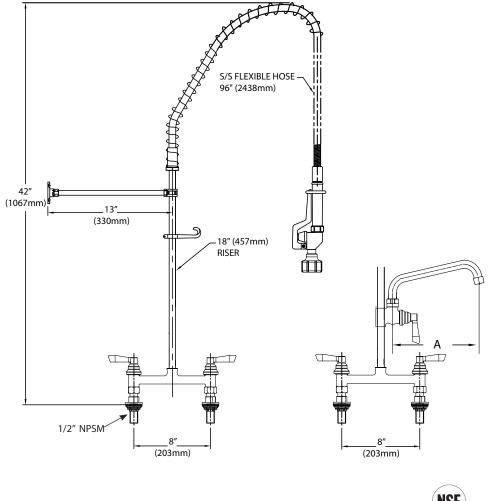

PRE-RINSE 4" OC ELEVATED DECK MOUNT TLL57-1100 SERIES

PRODUCT OVERVIEW / FEATURES

Solid low lead heavy-duty cast body with fan knife spray valve.

- 4" OC elevated deck mount
- Chrome plated spring
- Patented "Kool Grip" lowers surface temperature up to 30° cross flow and back flow
- 1.15 gpm @ 60 psi water saving spray head
- 1/4 Turn full open ceramic valves with lifetime guarantee
- Patented wall bracket with compression fitting

Model No.	Description
TLL57-1100-BRZ	Without Add-On Faucet


Model No.	Spout Length (A)
TLL57-1100-AF1Z	6" (152mm)
TLL57-1100-AF2Z	8" (203mm)
TLL57-1100-AF3Z	10" (254mm)
TLL57-1100-AF4Z	12" (305mm)
TLL57-1100-AF5Z	14" (356mm)
TLL57-1100-AF6Z	16" (406mm)
TLL57-1100-AF7Z	18" (457mm)


To add optional mounting kit use TLL57-1100-BRMKZ

To add optional mounting kit with add-on models use TLL57-1100-AFxMKZ

Approximate shipping weight - 13 lb Warranty - 1 year parts NOTE: Uses TLL-0010 Repair Kit



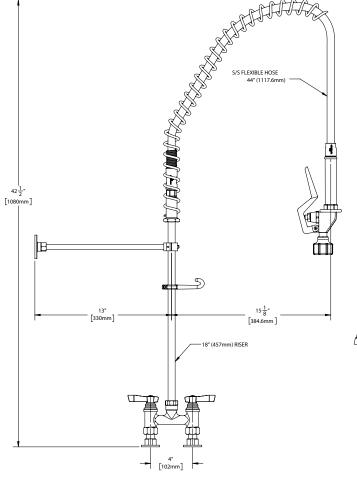





Solid low lead heavy-duty cast body with fan knife spray valve.

- Single pantry deck mount
- Chrome plated spring
- Patented "Kool Grip" lowers surface temperature up to 30° cross flow and back flow
- 1.15 gpm @ 60 psi water saving spray head
- 1/4 Turn full open ceramic valves with lifetime guarantee
- Patented wall bracket with compression fitting


Model No.	Description
TLL20-1100-BRZ	Without Add-On Faucet


Model No.	Spout Length (A)
TLL20-1100-AF1Z	6" (152mm)
TLL20-1100-AF2Z	8" (203mm)
TLL20-1100-AF3Z	10" (254mm)
TLL20-1100-AF4Z	12" (305mm)
TLL20-1100-AF5Z	14" (356mm)
TLL20-1100-AF6Z	16" (406mm)
TLL20-1100-AF7Z	18" (457mm)

Approximate shipping weight - 10 lb Warranty - 1 year parts

NOTE: Uses TLL-0010 Repair Kit



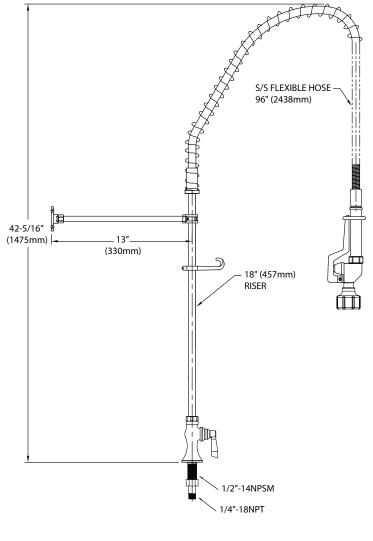



C US NSF - 61/9-372 - U.P. Code ASME A112.18.1/CSA B125.1

FAUCET, SPLASH MOUNT, 8" O.C. TLL13-81xx-SE1Z SERIES


PRODUCT OVERVIEW / FEATURES

Solid heavy duty low lead cast body is specification and commercial quality.

- 8" OC splash mount
- Standard lever handles
- ¼ Turn full open ceramic valves with lifetime guarantee
- Built-in check valves to prevent cross flow and back flow
- Stainless steel spouts with double O-ring seal
- 2.2 gpm aerator standard (others available on application)



Model No.	Spout	Spout Length (A)
TLL13-8100-SE1Z		3-1/2" (89mm)
TLL13-8101-SE1Z	Swivel Gooseneck	8-1/2" (216mm)
TLL13-8102-SE1Z		6" (152mm)
TLL13-8106-SE1Z		6" (152mm)
TLL13-8108-SE1Z		8" (203mm)
TLL13-8110-SE1Z	Tubular Suina	10" (254mm)
TLL13-8112-SE1Z	– Tubular Swing -	12" (305mm)
TLL13-8114-SE1Z	_	14" (356mm)
TLL13-8116-SE1Z		16" (406mm)
TLL13-8118-SE1Z	Double Jointed Tubular Swing	18" (457mm)
To add optional mo	unting kit use TLL13-	81xx-SE1MKZ
NOTE: Uses TLL-002	10 Repair Kit	

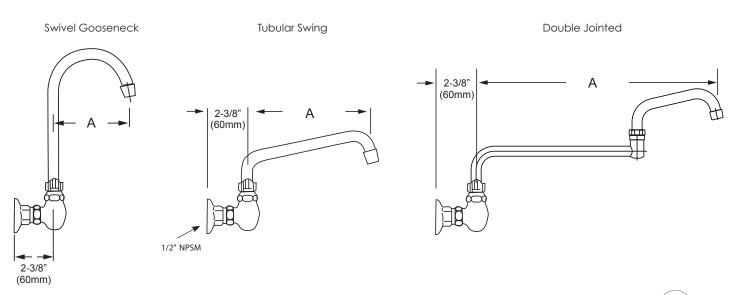

Solid heavy duty low lead cast body is specification and commercial quality.


- 4" OC splash mount
- Standard lever handles
- ¼ Turn full open ceramic valves with lifetime guarantee
- Built-in check valves to prevent cross flow and back flow
- Stainless steel spouts with double O-ring seal
- 2.2 gpm aerator standard (others available on application)



Model No.	Spout	Spout Length (A)
TLL15-4100-SE1Z		3-1/2" (89mm)
TLL15-4101-SE1Z	Swivel Gooseneck	8-1/2" (216mm)
TLL15-4102-SE1Z		6" (152mm)
TLL15-4106-SE1Z	_	6" (152mm)
TLL15-4108-SE1Z		8" (203mm)
TLL15-4110-SE1Z	Tule uleur Curine er	10" (254mm)
TLL15-4112-SE1Z	- Tubular Swing - - 	12" (305mm)
TLL15-4114-SE1Z		14" (356mm)
TLL15-4116-SE1Z		16" (406mm)

To add optional mounting kit use TLL15-41xx-SE1MKZ

NOTE: Uses TLL-0010 Repair Kit

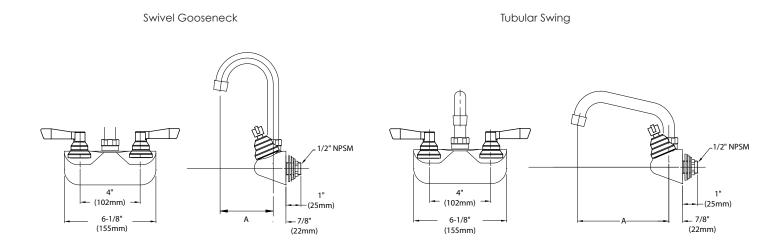

FAUCET, DECK MOUNT, 4" O.C. TLL11-41xx-SE1Z SERIES


PRODUCT OVERVIEW / FEATURES

Solid heavy duty low lead cast body is specification and commercial quality.

- 4" OC deck mount
- Standard lever handles
- ¼ Turn full open ceramic valves with lifetime guarantee
- Built-in check valves to prevent cross flow and back flow
- Stainless steel spouts with double O-ring seal
- 2.2 gpm aerator standard (others available on application)



Model No.	Spout	Spout Length (A)
TLL11-4100-SE1Z	Swivel Gooseneck	3-1/2" (89mm)
TLL11-4101-SE1Z		8-1/2" (216mm)
TLL11-4102-SE1Z		6" (152mm)
TLL11-4106-SE1Z		6" (152mm)
TLL11-4108-SE1Z	_	8" (203mm)
TLL11-4110-SE1Z	– Tubular Swing -	10" (254mm)
TLL11-4112-SE1Z		12" (305mm)
TLL11-4114-SE1Z		14" (356mm)
TLL11-4116-SE1Z		16" (406mm)
TLL11-4118-SE1Z	_ Double Jointed _	18" (457mm)
TLL11-4124-SE1Z	Tubular Swing	24" (609mm)
NOTE: Uses TLL-00:	10 Repair Kit	

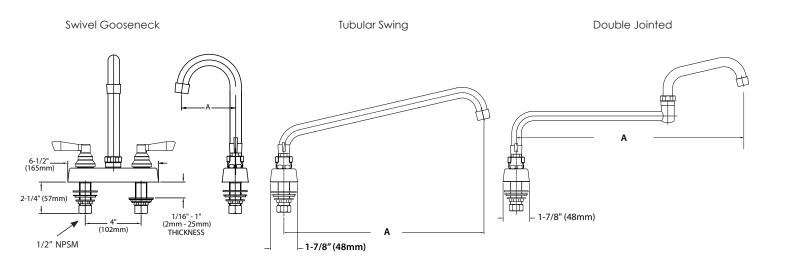




Solid heavy duty low lead cast body is specification and commercial quality.

- 8" OC deck mount
- Standard lever handles
- 1/4 Turn full open ceramic valves with lifetime guarantee
- Built-in check valves to prevent cross flow and back flow
- Stainless steel spouts with double O-ring seal
- 2.2 gpm aerator standard (others available on application)



Model No.	Spout	Spout Length (A)
TLL11-8100-SE1Z		3-1/2" (89mm)
TLL11-8101-SE1Z	Swivel Gooseneck	8-1/2" (216mm)
TLL11-8102-SE1Z		6" (152mm)
TLL11-8106-SE1Z	_	6" (152mm)
TLL11-8108-SE1Z	_	8" (203mm)
TLL11-8110-SE1Z	Tubular Swina	10" (254mm)
TLL11-8112-SE1Z	– Tubular Swing -	12" (305mm)
TLL11-8114-SE1Z		14" (356mm)
TLL11-8116-SE1Z		16" (406mm)
TLL11-8118-SE1Z	Double Jointed Tubular Swing	18'' (457mm)
NOTE: Uses TLL-00	10 Repair Kit	

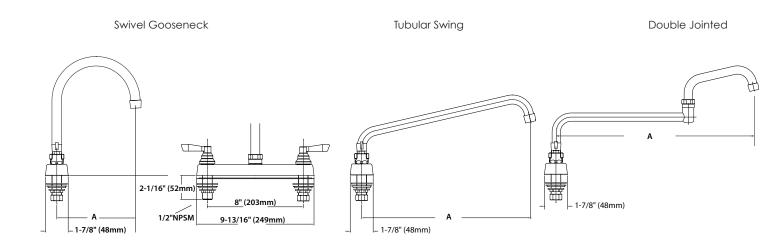



FAUCET, DECK MOUNT, ELEVATED BRIDGE, 8" O.C. TLL61-81xx-SE1Z SERIES

PRODUCT OVERVIEW / FEATURES

Solid heavy duty low lead cast body is specification and commercial quality.


- 8" elevated deck mount
- Standard lever handles
- 1/4 Turn full open ceramic valves with lifetime guarantee
- Built-in check valves to prevent cross flow and back flow
- Stainless steel spouts with double O-ring seal
- 2.2 gpm aerator standard (others available on application)




Model No.	Spout	Spout Length (A)
TLL61-8100-SE1Z		3-1/2" (89mm)
TLL61-8101-SE1Z	Swivel Gooseneck	8-1/2" (216mm)
TLL61-8102-SE1Z		6" (152mm)
TLL61-8106-SE1Z		6" (152mm)
TLL61-8108-SE1Z		8" (203mm)
TLL61-8110-SE1Z	Tude of each Continue of	10" (254mm)
TLL61-8112-SE1Z	Tubular Swing	12" (305mm)
TLL61-8114-SE1Z	_	14" (356mm)
TLL61-8116-SE1Z		16" (406mm)

To add optional mounting kit use TLL61-81xx-SE1MKZ

NOTE: Uses TLL-0010 Repair Kit

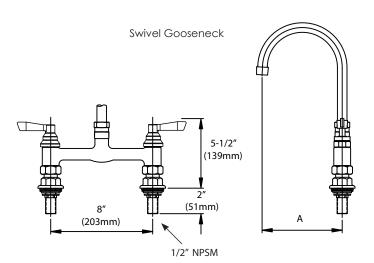

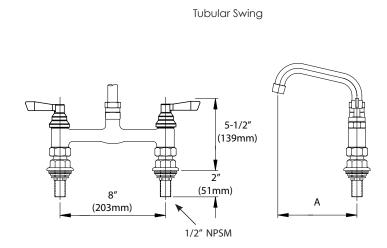



Solid heavy duty low lead cast body is specification and commercial quality.


- 4" elevated deck mount
- Standard lever handles
- ¼ Turn full open ceramic valves with lifetime guarantee
- Built-in check valves to prevent cross flow and back flow
- Stainless steel spouts with double O-ring seal
- 2.2 gpm aerator standard (others available on application)




Model No.	Spout	Spout Length (A)
TLL57-4100-SE1Z		3-1/2" (89mm)
TLL57-4101-SE1Z	Swivel Gooseneck	8-1/2" (216mm)
TLL57-4102-SE1Z		6" (152mm)
TLL57-4106-SE1Z		6" (152mm)
TLL57-4108-SE1Z		8" (203mm)
TLL57-4110-SE1Z	Tule uleur Curine er	10" (254mm)
TLL57-4112-SE1Z	– Tubular Swing	12" (305mm)
TLL57-4114-SE1Z		14" (356mm)
TLL57-4116-SE1Z		16" (406mm)

To add optional mounting kit use TLL57-41xx-SE1MKZ

NOTE: Uses TLL-0010 Repair Kit





Tubular Swing



FAUCET, DECK MOUNT, DOUBLE PANTRY TLL50-91xx-SE1Z SERIES


PRODUCT OVERVIEW / FEATURES

Solid heavy duty low lead cast body is specification and commercial quality.

- Double pantry deck mount
- Standard lever handles
- ¼ Turn full open ceramic valves with lifetime guarantee
- Built-in check valves to prevent cross flow and back flow
- Stainless steel spouts with double O-ring seal
- 2.2 gpm aerator standard (others available on application)



Model No.	Spout	Spout Length (A)
TLL50-9100-SE1Z		3-1/2" (89mm)
TLL50-9101-SE1Z	Swivel Gooseneck	8-1/2" (216mm)
TLL50-9102-SE1Z		6" (152mm)
TLL50-9106-SE1Z	_	6" (152mm)
TLL50-9108-SE1Z	_	8" (203mm)
TLL50-9110-SE1Z	- Tubular Swing	10" (254mm)
TLL50-9112-SE1Z	- Tubulai Swirig	12" (305mm)
TLL50-9114-SE1Z	-	14" (356mm)
TLL50-9116-SE1Z		16" (406mm)

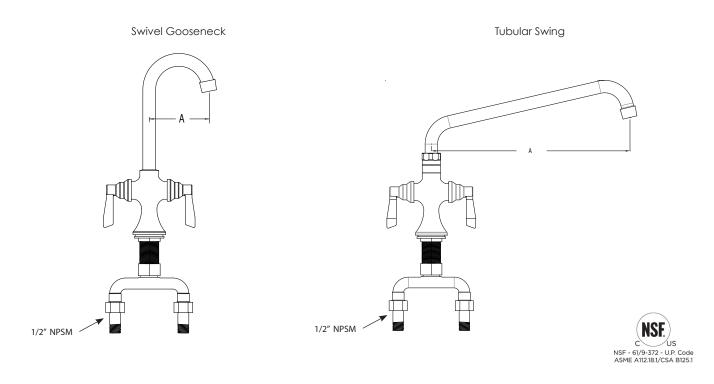



Solid heavy duty low lead cast body is specification and commercial quality.

- Single pantry deck mount
- Standard lever handles
- 1/4 Turn full open ceramic valves with lifetime guarantee
- Built-in check valves to prevent cross flow and back flow
- Stainless steel spouts with double O-ring seal
- 2.2 gpm aerator standard (others available on application)



Model No.	Spout	Spout Length (A)
TLL20-9100-SE1Z		3-1/2" (89mm)
TLL20-9101-SE1Z	Swivel Gooseneck	8-1/2" (216mm)
TLL20-9102-SE1Z	_	6" (152mm)
TLL20-9106-SE1Z		6" (152mm)
TLL20-9108-SE1Z	_	8" (203mm)
TLL20-9110-SE1Z	Tubular Surina	10" (254mm)
TLL20-9112-SE1Z	- Tubular Swing	12" (305mm)
TLL20-9114-SE1Z	-	14" (356mm)
TLL20-9116-SE1Z		16" (406mm)





Tubular Swing



FAUCET, 4" DECK OR SPLASH MOUNT, HYBRID KHS11-4000-Z/KHS15-4000-Z SERIES

PRODUCT OVERVIEW / FEATURES


High impact polymer body with brass over mold.

- 4" OC hybrid splash or deck mount
- Knob handles
- 1/4 turn full open stainless steel compression valves

• 2.0 gpm aerator standard (others available on application)



Model No.	Spout	Spout Length (A)
KHS11-4000-Z	Swivel	2 1/0" (00,000)
KHS15-4000-Z	Gooseneck	3-1/2" (89mm)
To add 4" wrist blade handles use KHS15-4000-SE4 or KHS11-4000-SE4		
NOTE: Uses KHS-0010 Repair Kit and Optional KHS-0001 Wrist Blade Handles		

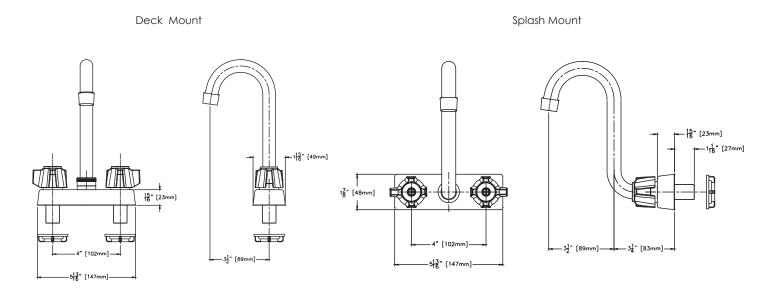

COMPLIES WITH: THE FEDERAL "REDUCTION OF LEAD IN DRINKING WATER ACT" – 2011 – US SENATE BILL NO. S.3874

Solid heavy duty low lead cast body is specification and commercial quality.

- Splash mount service sink
- Rough chrome finish
- Top support wall bracket
- Vacuum breaker spout
- Compression valves
- In-line check valves
- Standard lever handles
- 1/2" NPSM female inlets


• 1-1/8" (29mm) holes for back splash are recommended to accommodate 1/2" supply nipples



Model No.	Spout	Hook	
KL78-8106-BR1	Threaded Cast	Yes	

3" (76mm) clearance from wall to center of faucet 9-3/16" (233mm) clearance from wall to center of outlet

NOTE: Uses K78-0010-Z Repair Kit or K78-0020-Z Vacuum Breaker Repair Kit

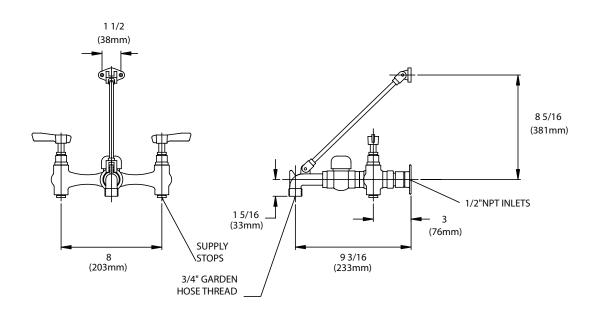

DRAINS, LEVER AND TWIST HANDLE D15/D55 SERIES


PRODUCT OVERVIEW / FEATURES


Nickel plated zinc drains with twist and lever style handles.

- 3-1/2" (89mm) sink opening
- 2" (51mm) NPS
- 4-3/8" (111mm) face flange diameter
- Flat strainer
- Self-centering stainless steel face flange
- Stainless steel handle





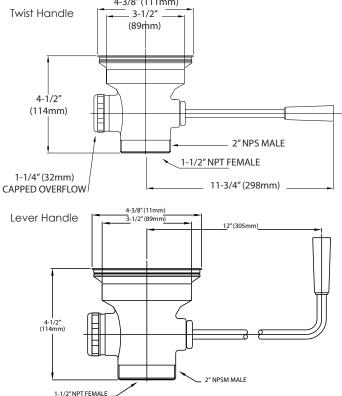

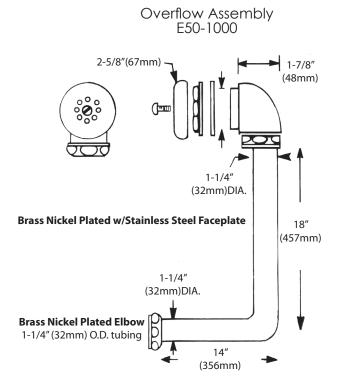



Economical ABS plastic drain with rotary handle.

- 3-1/2" (89mm) sink opening
- Plastic 1-1/2" and 2" NPT
- Beehive crumb cup strainer

- Chemical resistant Celcon® seals
- Full opening ball valve
- 4" face flange



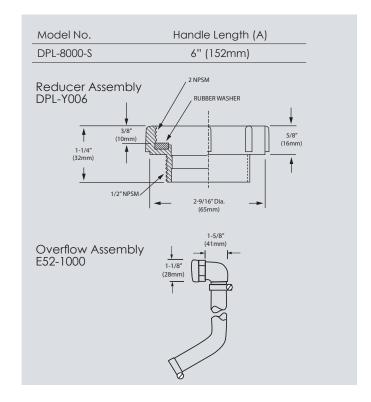

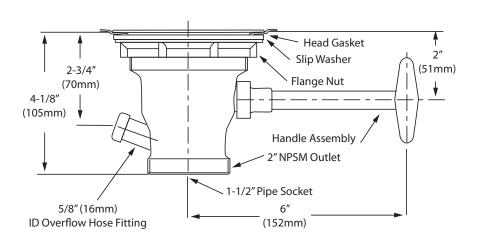

All Top-Line faucet and pre-rinse bodies come with 1/4 turn full open ceramic valves with lifetime guarantee and built-in check valves

• Standard lever handles

Ceramic valves



8" (203mm) Splash Mount		
Model No.	Description	
TLL13-Y001-CCVZ	8" OC	



4" (102mm) Splash Mount		
Model No.	Description	
TLL15-Y001-CCVZ	4" OC	



8" (203mm) Splash Mount		
Model No.	Description	
TLL70-Y001-CCVZ	Single	



4" (102mm) Deck Mount

Model No. Description

TLL11-Y001-CCVZ 4" OC



8" (203mm) Deck Mount

Model No. Description

TLL11-Y003-CCVZ 8" OC



Single Pantry Deck Mount

Model No. Description

TLL20-Y003-CCVZ Single Pantry



Double Pantry Deck Mount		
Model No.	Description	
TLL50-Y001-CCVZ	Faucet	
TLL50-Y002-CCVZ	Pre-Rinse	



4" (102mm) Elevated Deck Mount
Model No. Description

TLL57-Y001-CCVZ 4" OC Elevated



8" (203mm) Elevated Deck Mount		
Model No.	Description	
TLL61-Y001-CCVZ	Faucet	
TLL61-Y002-CCVZ	Pre-Rinse	









Gooseneck Spout	
Model No.	Spout Size
KS11-06-X000-Z	3-1/2" (89mm) Swivel
KS11-06-X001-Z	8-1/2" (216mm) Swivel
KS11-06-X002-Z	6" (152mm) Swivel
KS11-06-X100-Z	3-1/2" (89mm) Rigid
KS11-06-X101-Z	8-1/2" (216mm) Rigid
KS11-06-X102-Z	6" (152mm) Rigid

Horizontal Spout	
Model No.	Spout Size
KS11-06-X006-Z	6" (152mm)
KS11-06-X008-Z	8" (203mm)
KS11-06-X010-Z	10" (254mm)
KS11-06-X012-Z	12" (305mm)
KS11-06-X014-Z	14" (356mm)
KS11-06-X016-Z	16" (406mm)

Double Jointed Spout		
Model No.	Spout Size	
KS11-06-X006-Z	18" (457mm)	
Double Jointed Spout Extension		
Model No.	Spout Size	
KS11-06-X012-Z	12" (305mm) Rigid	







Ceramic Valve Repair Kit	
Model No.	Description
TLL-0010-Z	New Lever Handles

Old Style Compression Valve Repair Kit	
Model No.	Description
TLL13-0010-Z	For Old Style TLL13 and TLL11 Series

Compression Valve Repair Kit	
Model No.	Description
TLL15-0010-Z	Old TLL15 Series





|--|

4" Wrist Blade Handles	
Model No.	Description
TLL-0001-Z	New Ceramic Faucets

Shoulder Bushing	
Model No.	Description
KS11-06-PRING	For Top-Line Spouts Only

Quick Disconnect	
Model No.	Description
KL50-QDISKTS	Retrofit Kit for T&S





Splash Faucet Mounting Kit

Model No.

Description

KL40-1000-Z

(2) 1/2" NPS Nipples, 1/2" NPT x 1/2" Sweat Ells Washers & Locknuts



Deck Faucet Mounting Kit

Model No.

Description

KL60-Y010-Z (2) 1/2" NPS Nipples, Washers & Locknuts



Coupling

Model No. Description

TLL13-Y007-CVZ With Check Valve



Swivel to Rigid Adapter

Model No.

Description

KL50-X122-Z

Converts Faucets with Swivel Spouts to Accept 3/8" NPT Male Riser Pipe or Rigid Gooseneck Spouts



Rigid to Swivel Adapter

Model No.

Description

KL50-X075-Z

Converts 3/8" NPT Female Outlets to Accept Swing or Swivel Gooseneck Spouts



Rigid Tee Supply Kit

Model No.

Description

KL50-0500-Z

To Supply Water to Dishwashing Soap Systems



Hose Adapter

Model No.

Description

KL50-X127-Z

Converts Encore Hose to Fit Fisher Pre-Rinse



Hose Adapter

Model No.

Description

KL50-X128-Z

Converts Encore Hose to Fit Chicago Pre-Rinse



Hose Adapter

Model No.


Description

KL50-0129-Z

Converts Standard Hose to Pre-Rinse to Male 1/2" NPT











Commercial Hoses Universal With Grip	
Model No.	Spout Size
KC50-Y004-20U	20" (508mm)
KC50-Y004-26U	26" (660mm)
KC50-Y004-44U	44" (1118mm)
KC50-Y004-60U	60" (1372mm)
KC50-Y004-72U	72" (1829mm)
KC50-Y004-96U	96" (2438mm)











Replacement Spring	
Model No.	Description
K50-X033-Z	Chrome Plated
Chrome plated heavy-duty gooseneck spring, heat treated, nickel plated. Ensures convenient hose position and flexibility.	



Wall Bracket				
Model No.	Description			
K50-Y020-Z	12" (305mm) Long and May be Cut to Permit Adjustments Between 2" (51mm) & 12" (305mm)			



Model No. Descri	
77.00.01.770	ption
K50-Y011-Z Includes Hoo	k and Screw



Easy Install Riser Pipe			
Model No.	Length		
KL50-Y226-18	18" (457mm)		



Rigid Riser Pipe		
Model No.	Length	
KL50-X077-Z	18" (457mm)	









Add-On Faucets Model No. Spout Size Suffix TLL55-7006-SE1Z 6" (152mm) -AF1 TLL55-7008-SE1Z 8" (203mm) -AF2 TLL55-7010-SE1Z 10" (254mm) -AF3 TLL55-7012-SE1Z 12" (305mm) -AF4 TLL55-7014-SE1Z 14" (356mm) -AF5



Old Style
Standard Spray Head Repair Kit
Model No.

Description

Includes 1.6gpm and
1.2gpm Spray Face,
Bumper and Screw



Old Style Utility Spry Valve

Model No. Description

TLL13-Y003-16Z 1.6 gpm



Low Lead Add-On Faucet Body

Model No. Description

TLL10-Y001-Z Body Only



Pre-Rinse Button Valve

Model No. Description

KL50-Y027-Z Replacement Button Valve for Pre-Rinse Spray Valve



Hose Grip

Model No. Description

KN50-X025-SGZ Standard Grip



Add-On Faucet Replacement Valve
Model No. Description

KL55-Y010-Z For TLL55/TLL10 Series



Pre-Rinse Broom

Model No. Description

Standard Pre-Rinse
Spray Head Brush
Attachment

*Will not work with PowerPulse spray

Point of Purchase Plumbing Display



Top-Line Countertop Display

CHG-TOPLINECTDISP

Increase your sales by displaying Top-Line's best selling products in colorful retail packaging while providing your customers with high quality choices.

Contact your local representative for more information.

TERMS & CONDITIONS

Terms of Payment - NET 30 days subject to satisfactory credit arrangements. (No shipments will be made to accounts which are in arrears.)

No Minimum Charge

Deliveries - Component Hardware® is not responsible for delays in deliveries due to circumstances beyond our control such are fires, strikes, transportation delays, material shortages, accidents or other contingencies of similar nature.

Returned Merchandise - No returned goods will be accepted without permission. A Returned Goods Authorization number is required prior to return, which can be obtained by calling Component Hardware at 800-526-3694. All returns must have the RGA Number posted on the exterior of all associated cartons.

No item will be accepted for return six months after invoice date. Freight charges for returned goods must be prepaid. All returned goods are subject to a 25% restocking charge and must be in complete and resalable condition. Items made to customers' specifications or specially ordered goods are not returnable.

Shortages - Any claims for shortage must be made immediately upon receipt of merchandise. Shortage claims will be invalid unless Component Hardware is notified in writing within 30 days of invoice date.

Special Products - If orders for items that are special (non-catalog) are cancelled, Component Hardware shall be reimbursed for any expense incurred in the purchase of raw or finished material and further processing thereof.

Product Changes - Although all items will be furnished as described unless otherwise indicated. However, we reserve the right to alter, modify, or redesign products without creating any liability for the obsolescence of customer inventories.

Taxes - Any federal, state or city taxes applicable will be added to prices shown. Clerical and printing errors and omissions are subject to correction. No representative, dealer, distributor or any other person is authorized or permitted to obligate this corporation to any liability, not strictly in accordance with the above policies.

LIMITED WARRANTY

PLEASE READ THIS LIMITED WARRANTY BEFORE INSTALLING OR USING ANY ENCORE® PRODUCT. IF THESE TERMS ARE NOT ACCEPTABLE TO YOU, IMMEDIATELY RETURN THE PRODUCT TO COMPONENT HARDWARE GROUP, INC. BEFORE INSTALLATION OR USE.

Component Hardware offers a three year warranty on all Encore Premium pre-rinses and electronic faucets. We offer a two year warranty on all other Encore products, with the exception of our commercial hoses, which carry a one year warranty. All TOP-LINE® products carry a one year warranty.

Encore premium plumbing products are manufactured to a rigid code of quality standards and subjected to extensive testing prior to shipment. We assure that each product leaves our factory in perfect working order. With proper care, Encore products will provide the user with years of satisfying service.

Component Hardware warrants to the original purchaser (other than for purposes of resale) of any Encore brand product that such product is free from defects in workmanship and materials for the warranty period from the original date of purchase. During this limited warranty period, if this product is found to be defective, Component Hardware will, at its option, repair and/or replace it. To obtain warranty service, products must be returned to Component Hardware Group, Inc., using the aforementioned procedure for Returned Merchandise. Shipping, freight, insurance and other transportation charges of the returned product to Component Hardware and the return of the repaired or replaced product to the purchaser are the responsibility of the purchaser. Replacement and/or repair under this warranty shall be made within a responsible time after receipt by Component Hardware of the returned product.

Any express warranty not provided herein and any remedy for breach of contract which but for this provision might arise by implication or operation of law, is hereby excluded and disclaimed. Any implied warranties of merchantability or fitness for a particular purpose are limited in duration to the above one-year period.

Under no circumstance shall Component Hardware be liable to purchaser or any other person for any loss of use of the product or any special or consequential costs, expenses or damages whether arising out of breach or warranty, breach of contract or otherwise incurred by the purchaser or any other user.

Some states do not allow limitations on how long an implied warranty lasts or the exclusion or limitation of incidental or consequential damages, so the above limitations or exclusions may not apply to you. This warranty gives you specific rights and you may also have other rights which vary from state to state.

All photographs and illustrations are considered to be a representation of the actual item. In some cases there may be slight variations. This catalog, copy, part numbers and unique method of illustrating products is copyrighted by Component Hardware Group, Inc. All rights reserved. No portion of this catalog may be reproduced in any form or by any means in whole or in part, without the written consent of Component Hardware. Component Hardware reserves the right to make any and all changes and to discontinue any of its products without notice. Not responsible for typographical errors.	



Our Top-Line economy line of plumbing products offers a cost-saving alternative able to meet the demands of the foodservice industry for durable, water-saving plumbing fixtures. Value and Performance.



