

# ORDER FORM FOR CUSTOM MADE GASKET FRAMES



INSTRUCTIONS: Use this order form for all custom made gaskets.  
Fill out the exact specifications and mail or fax it to us.

**PLEASE NOTE: CUSTOM MADE ITEMS ARE NOT RETURNABLE.**

## SELECTION CHART



REF.	QTY.	MODEL NO.	TYPE
1	_____	5270	Standard Magnetic
2	_____	1094	Standard Magnetic
3	_____	6449	Standard Magnetic
4	_____	10-516	Snap-in Magnetic
5	_____	5804	Standard Compression
6	_____	20-001-8	Rigid Retainer, 8 ft Lengths

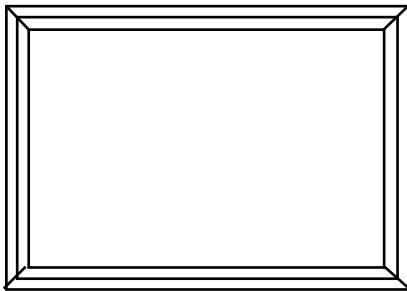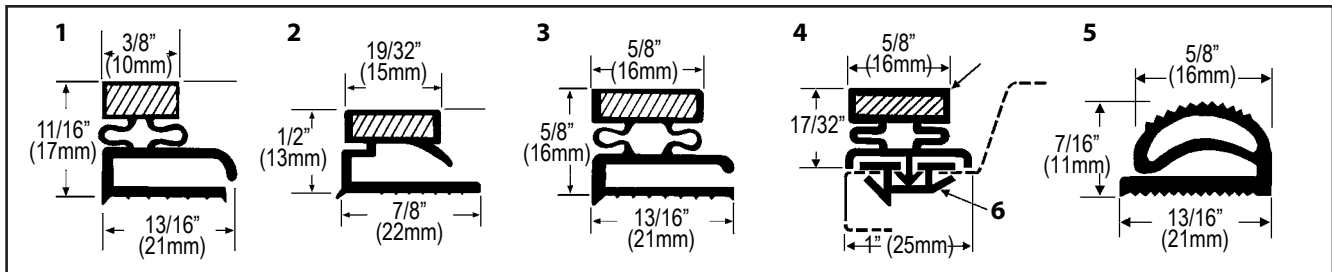

SPECIFY MEASUREMENTS

WIDTH \_\_\_\_\_

HEIGHT \_\_\_\_\_

NUMBER OF SIDES

3     4


MEASUREMENT METHOD

EDGE TO EDGE


DART TO DART

MEASURING A GASKET FRAME:

STANDARD FRAMES



SNAP-IN FRAMES

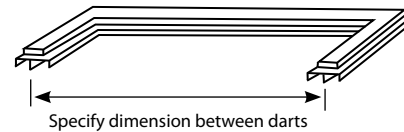

### PRE-INSTALLATION TIPS

- Allow replacement gasket to reach room temperature before unfolding.
- Carry gasket by its corners and avoid squeezing folds to prevent breaking the internal magnetic strip.
- Thoroughly clean the area of the door where the gasket attaches, as well as the cabinet perimeter that the gasket face contacts.

### DISTORTIONS

- Our gaskets are made from a vinyl material which can become distorted from folding. The folding is necessary to allow a practical and economically sized shipping parcel.
- The vinyl material retains a "memory" of its original shape so any distortions or kinks will only be temporary.
- Return to the original shape can be accelerated greatly by the application of heat, for example:

Immerse gasket in 140°-185°F (60°-85°C) water for 15 to 30 minutes before installing.

Apply heat from an electric hair dryer or heat lamp before and after installation. Care must be taken not to overheat and stretch or melt the material when using this method.

COMPANY NAME \_\_\_\_\_ DATE \_\_\_\_\_

ADDRESS \_\_\_\_\_ PHONE \_\_\_\_\_

\_\_\_\_\_ PURCHASE ORDER NO. \_\_\_\_\_

\_\_\_\_\_ AUTHORIZED BY \_\_\_\_\_

